


ITEM CODE - SHLD034

22 AWG 4/CORE SCREENED SPECIAL DMX CABLE

➤ 22 AWG 2 Pair 100% Tinned Copper Screened DMX Cable For Stage / Theater Lighting.

CONSTRUCTION	
Center Conductor	: 22 AWG, 7/0.254 mm Annealed Tinned Copper.
Insulation	: P.P
Core Colour	: White, Brown, Yellow, Green
Screening - I ST	: Banded Aluminum Foil With 100 % Coverage.
Drain Wire	: 7/0.20 mm ATC
Screening - II ND	: 90 % (Nom) Coverage. ATC
Outer Jacket	: Soft PVC
Outer Jacket Colour	: Black / As Per Customer
Printing	: Falcon RoHS DMX DATA 434 100% Screened Cable M/M
DIAMETERS	
Center Conductor	: 7/0.254 ± 0.005 mm
Insulation	: 1.50 ± 0.05 mm
Outer Jacket Diameter	: 7.00 ± 0.50 mm
Length / Coil	: 100 Mtrs / As Per Customer
ELECTRICAL	
DC Resistance (Max.) At 20°C	: 56.80 Ω-km
Temperature	: -15° to 70°Celsius
Insulation Resistance (Min.) At 20°C	: 5000 M Ω-km

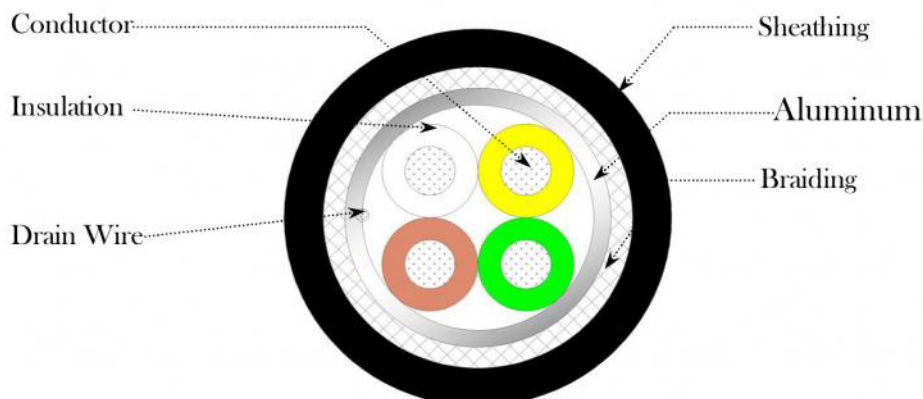

ISSUE	Prepared By	Approved By
No. 01.		